


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：4/3" C 型 f=25mm F2.8
- ◆ 多层镀膜，有效提高透过率
- ◆ 2000 万像素高品质影像
- ◆ 高对比度、大景深设计
- ◆ 畸变小于 0.1%
- ◆ 适用机器视觉, 工业监控等

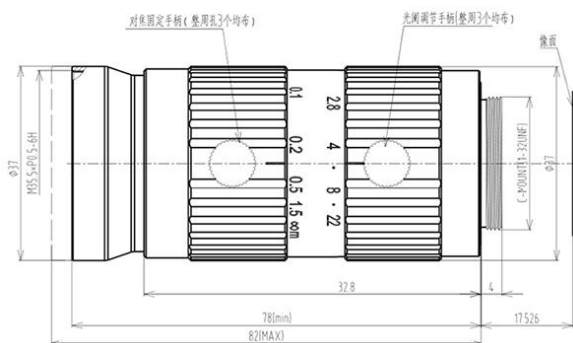

产品规格书：

2000 万像素 25mm 低畸变 FA 镜头 C Mount		物距 Working Distance	倍率 Optical Magnification	视野 4/3"Field of View(mm)	
型号 Model	KM2528MP20	mm	X	H	V
相机靶面 Image Size	4/3-inch	5000	0.005X	3441.1	2580.8
焦距 Focal length	25mm	2000	0.013X	1384.5	1038.4
光圈范围 F No.	F2.8-22	1000	0.025X	898.8	524.1
最短物距 M.O.D(m)	0.1-Inf.	900	0.028X	630.2	427.7
控制方式 Operation	Iris	Manual 手动调整	800	0.031X	561.6
	Focus	Manual 手动调整	700	0.036X	493.0
视场角 Angle of View (D×H×V)	4/3"	45.9°×37.5°×28.5°	600	0.042X	424.4
	1"	34.2°×27.6°×20.9°	550	0.045X	390.0
	2/3"	23.9°×19.2°×14.5°	500	0.050X	355.7
畸变 Distortion	<0.03%	450	0.055X	321.4	241.0
光学后焦 BFL	29.6mm	400	0.061X	287.0	215.3
接口 Mount	C-Mount	350	0.070X	252.6	189.5
近摄视野 Object Dimension	218.2mm×163.7mm(WD=300 mm)	300	0.081X	218.2	163.7
外形尺寸 Dimension	Φ37×78mm	250	0.096X	183.8	137.8
重量 Weight	182.0g	200	0.118X	149.2	111.9
滤镜尺寸 Filter Thread	M35.5x 0.5	150	0.154X	114.6	86.0
工作温度 Working Temperature	-20°C ~ +60°C	100	0.221X	79.8	59.8