


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 6mm F2.8
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高清晰度画面
- ◆ 低物距、低畸变、对比度好
- ◆ 光学性能好, 高低温稳定性强
- ◆ 体积小适用于工业检测, 机器视觉



产品规格书：

1200 万像素 6mm 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnific ation	视野 1/1.7" Field of View(7.6*5.7mm)		
型号 Model	LM0628MP12	mm	X	H	V	
像机尺寸 Image Size	1/1.7-inch(Φ9.5)	1000	0.0061X	1261.70	946.53	
焦距 Focal length	6mm	900	0.0068X	1137.72	853.42	
光圈范围 F No.	F2.8-16	800	0.0076X	1013.74	760.30	
最短物距 M.O.D(m)	0.1-Inf.	700	0.0086x	889.76	667.19	
控制方式 Operation	Iris	Manual 手动调整	650	0.0093X	827.77	620.64
	Focus	Manual 手动调整	600	0.010X	765.78	574.08
视场角 (D*H*V) Angle of View	1/1.7"	74.97°x63.58°x49.92°	550	0.0109X	703.79	527.52
畸变 Distortion	<0.1%	500	0.012X	641.80	480.96	
光学后焦 BFL	9.98mm	450	0.0133X	579.80	434.41	
法兰后焦距 Flange BFL	17.526mm	400	0.0149X	517.81	387.85	
接口 Mount	C-Mount	350	0.0169X	455.81	341.29	
最大主光线夹角 CRA	13.6°	300	0.0196X	393.81	294.73	
外形尺寸 Dimension	Φ39x32.53mm	250	0.0233X	331.81	248.16	
重量 Weight	66.0g	200	0.0287X	269.80	201.60	
滤镜尺寸 Filter Thread	M37.5xP0.5	150	0.0374X	207.77	155.02	
工作温度 Working Temperature	-20°C ~ +60°C	100	0.0536X	145.72	108.43	

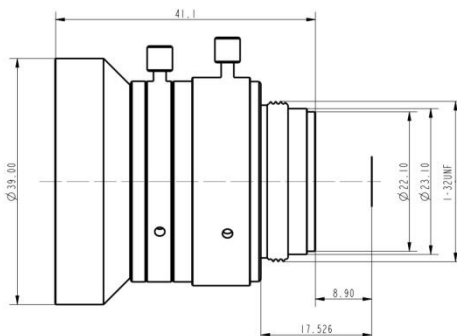