


- ◆品牌：中联科创（ZLKC）
- ◆规格：1/1.7" C 型 6mm F2.8
- ◆多层镀膜,兼容可见光和红外光
- ◆1200 万像素高清晰度画面
- ◆低物距、低畸变、对比度好
- ◆抗震结构，高低温稳定性强
- ◆体积小适用于工业检测，机器视觉



产品规格书:

| 1200 万像素 6mm 低畸变镜头 C Mount   |             |                      | 物距<br>Working<br>Distance | 倍率<br>Magnifi<br>cation | 视野 1/1.8"Field of<br>View(7.4*4.92mm<br>) |        |
|------------------------------|-------------|----------------------|---------------------------|-------------------------|-------------------------------------------|--------|
| 型号 Model                     |             | LM0628MP12           | mm                        | X                       | H                                         | V      |
| 像机尺寸 Image Size              |             | 1/1.7-inch(Φ9.5)     | 1000                      | 0.006X                  | 1225.6                                    | 815.87 |
| 焦距 Focal length              |             | 6mm                  | 900                       | 0.007X                  | 1105.2                                    | 735.58 |
| 光圈范围 F No.                   |             | F2.8-16              | 800                       | 0.008X                  | 984.74                                    | 655.3  |
| 最短物距 M.O.D(m)                |             | 0.1-Inf.             | 700                       | 0.009x                  | 864.28                                    | 575.02 |
| 控制方式 Operation               | Iris        | Manual 手动调整          | 650                       | 0.009X                  | 804.05                                    | 534.87 |
|                              | Focus       | Manual 手动调整          | 600                       | 0.01X                   | 743.82                                    | 494.73 |
| 视场角 (D*H*V)<br>Angle of View | 1/1.7"      | 74.97°×63.58°×49.92° | 550                       | 0.011X                  | 683.59                                    | 454.59 |
| 畸变 Distortion                | <0.1%       |                      | 500                       | 0.012X                  | 623.36                                    | 414.45 |
| 光学后焦 BFL                     | 9.98mm      |                      | 450                       | 0.013X                  | 563.13                                    | 374.3  |
| 法兰后焦距 Flange<br>BFL          | 17.526mm    |                      | 400                       | 0.015X                  | 502.9                                     | 334.16 |
| 接口 Mount                     | C-Mount     |                      | 350                       | 0.017X                  | 442.67                                    | 294.01 |
| 最大主光线夹角 CRA                  | 13.6°       |                      | 300                       | 0.02X                   | 382.43                                    | 253.87 |
| 外形尺寸 Dimension               | Φ39×32.53mm |                      | 250                       | 0.023X                  | 322.19                                    | 213.72 |
| 重量 Weight                    | 66.0g       |                      | 200                       | 0.029X                  | 261.94                                    | 173.57 |
| 滤镜尺寸 Filter<br>Thread        | M37.5xP0.5  |                      | 150                       | 0.037X                  | 201.68                                    | 133.41 |
| 工作温度 Working<br>Temperature  | -20℃ ~ +60℃ |                      | 100                       | 0.054X                  | 141.39                                    | 93.24  |

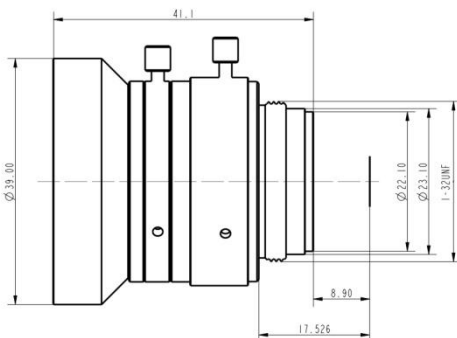