


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=12mm F2.8
- ◆ 800 万像素高分辨率
- ◆ 宽带增透膜，提高透光性能
- ◆ 低畸变，相对照度高
- ◆ 全玻设计，高低温稳定性强
- ◆ 适用于机器视觉，读码识别



产品规格书：

800 万像素 12mm FA 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 2/3" Field of View(8.45*7.07mm)	
型号 Model	LM1228MP8	mm	X	H	V
像机尺寸 Image Size	Φ 11 mm(2/3")	∞	-	-	-
焦距 Focal length	12mm	1000	0.0120X	703.239	588.595
光圈范围 F No.	F2.8-16	900	0.0134X	633.599	530.306
最短物距 M.O.D(m)	0.1-Inf.	800	0.0150X	563.958	472.017
控制方式 Operation	Iris	Manual 手动调整	700	0.0171X	494.318
	Focus	Manual 手动调整	650	0.0184X	459.498
视场角(D*H*V) Angle of View	2/3"	48.50°×39.00°×29.92°	600	0.0199X	424.677
畸变 Distortion	<0.28%	550	0.0217X	389.857	326.295
光学后焦 BFL	12.86mm	500	0.0239X	355.037	297.150
法兰后焦 Flange BFL	17.526mm	450	0.0265X	320.217	268.006
接口 Mount	C-Mount	400	0.0297X	285.396	238.861
最大主光线夹角 CRA	6°	350	0.0338X	250.576	209.717
外形尺寸 Dimension	Φ33×40.85mm	300	0.0393X	215.756	180.573
重量 Weight	68.3g	250	0.0468X	180.935	151.428
分辨率 Resolution	8MP	200	0.0580X	146.115	122.284
滤镜尺寸 Filter Thread	M30.5x 0.5	150	0.0761X	111.294	93.141
工作温度 Working Temperature	-20℃ ~ +60℃	100	0.1107X	76.474	63.998

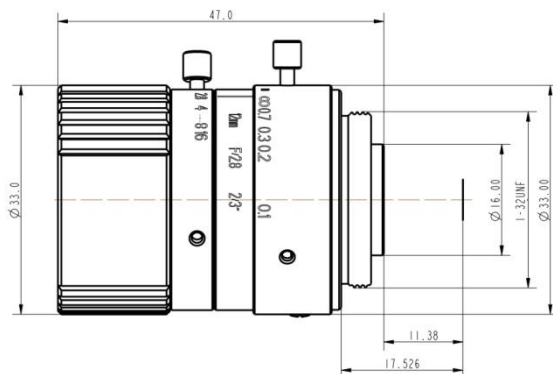