


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=25mm F2.8
- ◆ 800 万像素高分辨率
- ◆ 宽带增透膜，提高透光性能
- ◆ 低畸变，相对照度高
- ◆ 全玻设计，高低温稳定性强
- ◆ 适用于机器视觉，读码识别



产品规格书：

800 万像素 25mm FA 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 2/3" Field of View(8.45*7.07mm)	
型号 Model	LM2528MP8	mm	X	H	V
像机尺寸 Image Size	Φ 11 mm(2/3")	∞	-	-	-
焦距 Focal length	25mm	1000	0.0254X	332.215	277.981
光圈范围 F No.	F2.8-16	900	0.0283X	298.456	249.729
最短物距 M.O.D(m)	0.2-Inf.	800	0.0319X	264.696	221.477
控制方式 Operation	Iris	Manual 手动调整	700	0.0366X	230.936
	Focus	Manual 手动调整	650	0.0395X	214.056
视场角(D*H*V) Angle of View	2/3"	25.44°×20.4°×15.5°	600	0.0429X	197.175
畸变 Distortion	<0.02%	550	0.0469X	180.295	150.847
光学后焦 BFL	14.2mm	500	0.0517X	163.415	136.722
法兰后焦 Flange BFL	17.526mm	450	0.0577X	146.534	122.596
接口 Mount	C-Mount	400	0.0652X	129.653	108.470
最大主光线夹角 CRA	15°	350	0.0750X	112.771	94.344
外形尺寸 Dimension	Φ33×31.22mm	300	0.0882X	95.889	80.218
重量 Weight	52.8g	250	0.1071X	79.006	66.092
分辨率 Resolution	8MP	200	0.1362X	62.121	51.965
滤镜尺寸 Filter Thread	M30.5x 0.5	150	0.1872X	45.232	37.837
工作温度 Working Temperature	-20°C ~ +60°C	100	-	-	-

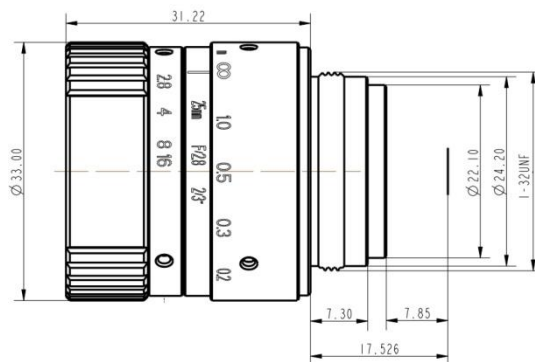