


2500 万像素工业镜头

SK1624MP25

- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1.2" C 型 16mm F2.4
- ◆ 多层镀膜, 消色差, 透过率好
- ◆ 2500 万像素超高分辨率
- ◆ 画面清晰度高, 光学性能出色
- ◆ 低畸变, 大光圈, 高周边光亮比
- ◆ 抗振动好, 兼容可见光和近红外

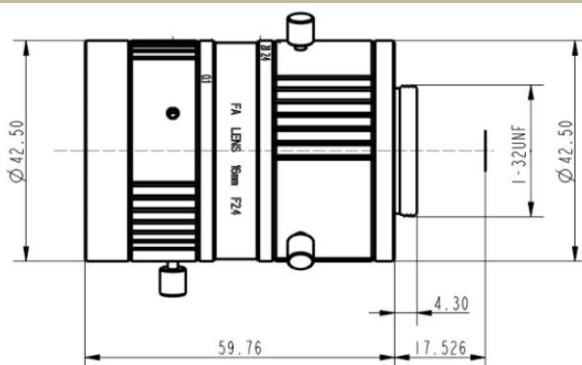

产品规格书：

2500 万像素 16mm 工业镜头 C Mount		物距 Working Distance	倍 率 Magnific ation	视野 1.2"Field of View(mm)	
型号 Model	SK1624MP25	mm	X	H	V
相机靶面 Image Size	1.2" (Φ19.3mm)	1000	0.0156X	942.55	814.70
焦距 Focal length	16mm	900	0.0173X	849.70	734.45
光圈范围 F No.	F2.4-F16	800	0.0194X	756.85	654.19
最短物距 M.O.D	0.1m	700	0.0222X	664.00	573.94
控制方式 Operation	Iris	Manual 手动调整	650	0.0238X	617.58
	Focus	Manual 手动调整	600	0.0258X	571.14
视场角 Angle of View (D×H×V)1.2"	61.60°×48.83°×42.88°	550	0.028X	524.71	453.54
畸变 Distortion	0.07%	500	0.0308X	478.28	413.40
光学后焦 BFL	19.64mm	450	0.0341X	431.84	373.26
法兰后焦 Flange BFL	17.526mm	400	0.0382X	385.39	333.12
接口 Mount	C-Mount	350	0.0434X	338.93	292.96
最大主光线夹角 CRA	6.5°	300	0.0503X	292.46	252.79
外形尺寸 Dimension	Φ42.5×59.76mm	250	0.0598X	245.97	212.61
滤镜尺寸 Filter Thread	M40.5×P0.5	200	0.0738X	199.45	172.39
解像力 Resolution	25MP	150	0.0963X	152.85	132.11
温度 Working Temperature	-20°C ~ +60°C	100	0.1388X	106.09	91.68

