


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.8" C 型 f=12mm F2.0
- ◆ 多层镀膜，有效抑制杂光和鬼像
- ◆ 5 百万像素大景深影像
- ◆ 高分辨率、大景深、无畸变
- ◆ 轻巧型，抗震性能好
- ◆ 适用工业检测，机器视觉等



产品规格书：

| 500 万像素 12mm 手动光圈镜头 C Mount | | 物距 Working Distance | 倍率 Optical Magnification | 视野 1/1.8" Field of View (mm) | | |
|---|-------------------------|------------------------|-----------------------------|---------------------------------|-------|-------|
| 型号 Model | VM1220MP5 | mm | - | H | V | |
| 像机尺寸 Image Size | 1/1.8-inch | 900 | 0.013X | 538.7 | 404 | |
| 焦距 Focal length | 12mm | 850 | 0.014X | 509 | 381.7 | |
| 光圈范围 F No. | F2.0-C | 800 | 0.015X | 479.3 | 359.5 | |
| 最短物距 M.O.D(m) | 0.1-Inf. | 750 | 0.016X | 449.6 | 337.2 | |
| 控制方式 Operation | Iris | Manual 手动调整 | 700 | 0.017X | 419.9 | 314.9 |
| | Focus | Manual 手动调整 | 650 | 0.018X | 390.3 | 292.7 |
| 视场角 Horizontal Angle of View (D×H×V) | 1/1.8" | 40.7°×33°×24.3° | 600 | 0.020X | 360.6 | 270.4 |
| | 1/2.5" | 33.3°×27.2°×20.7° | 550 | 0.022X | 330.9 | 248.2 |
| | 1/3" | 28.1°×22.9°×17.6° | 500 | 0.024X | 301.2 | 225.9 |
| 畸变 Distortion | <0.1% | 450 | 0.026X | 271.5 | 203.6 | |
| 光学后焦 BFL | 12.5mm | 400 | 0.030X | 241.8 | 181.4 | |
| 接口 Mount | C-Mount | 350 | 0.034X | 212.1 | 159.1 | |
| 近摄视野 Object Dimension | 182mm×136.8mm(WD=300mm) | 300 | 0.039X | 182.0 | 136.8 | |
| 外形尺寸 Dimension | Φ26.8×19.9mm | 250 | 0.047X | 152.7 | 114.5 | |
| 重量 Weight | 32.0g | 200 | 0.058X | 123 | 92.3 | |
| 滤镜尺寸 Filter Thread | M25.5x 0.5 | 150 | 0.077X | 93.3 | 70 | |
| 工作温度 Working Temperature | -20°C ~ +60°C | 100 | 0.113X | 63.7 | 47.8 | |

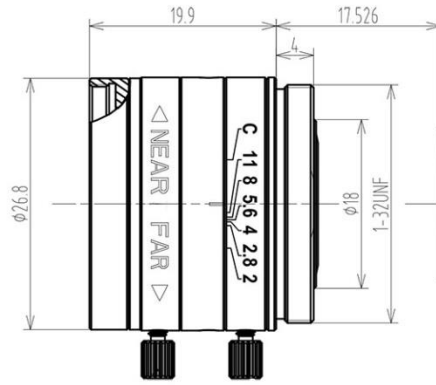