


- ◆品牌：中联科创（ZLKC）
- ◆规格：2/3" C 型 f=35mm
- ◆1000 万像素高分辨率
- ◆宽带增透膜，提高透光性能
- ◆低畸变，相对照度高
- ◆全玻设计，高低温稳定性强
- ◆兼容可见光和红外波段适用



产品规格书：

1000 万像素 35mm 工业镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 2/3"Field of View(mm)	
型号 Model	VM3528MP10	mm	X	横边 H	纵边 V
像机尺寸 Image Size	2/3-inch	1000	0.035X	241.13	200.42
焦距 Focal length	35mm	950	0.037X	228.65	190.05
光圈范围 F No.	F2.8-16	900	0.039X	216.19	179.69
最短物距 M.O.D(m)	0.15-Inf.	850	0.041X	203.73	169.33
控制方式 Operation	Iris	Manual 手动调整	800	0.044X	191.26
	Focus	Manual 手动调整	750	0.047X	178.80
视场角 Angle of View (D×H×V)	2/3"	18.4°×14.8°×11.1°	700	0.050X	166.33
	1/2"	13.4°×10.8°×8.1°	650	0.054X	153.86
	1/3"	10.1°×8.1°×6.1°	600	0.058X	141.39
畸变 TV Distortion	-0.17%	550	0.064X	128.93	107.16
光学后焦 BFL	13.63mm	500	0.070X	116.45	96.79
法兰距 Flange FL	17.526mm	450	0.078X	103.99	86.44
接口 Mount	C-Mount	400	0.088X	91.53	76.07
近摄视野 2/3"FOV	41.6mm×34.6mm(WD=200mm)	350	0.100X	79.06	65.69
外形尺寸 Dimension	Φ29×40.5mm	300	0.117X	66.59	55.34
重量 Weight	64.8g	250	0.140X	54.12	44.98
滤镜尺寸 Filter	M27 P=0.5mm	200	0.175X	41.66	34.62
工作温度 Working Temperature	-20℃ ~ +60℃	150	0.233X	30.03	24.96

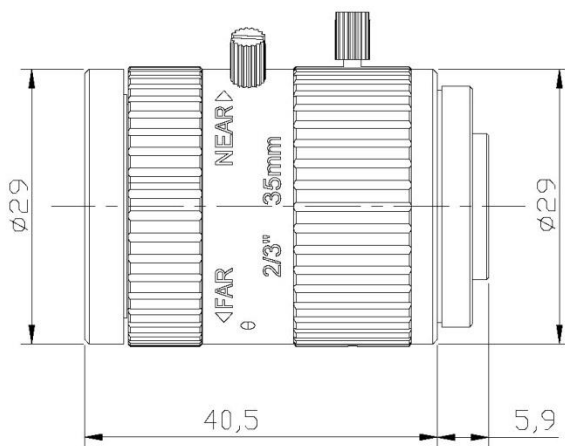