


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=75mm
- ◆ 宽带增透膜，提高透光性能
- ◆ 千万像素高精度成像
- ◆ 高分辨率、大景深、无畸变
- ◆ 紧凑外形小，抗震性能好
- ◆ 适用工业检测，工业自动化等



产品规格书：

1000 万像素 75mm 工业镜头 C Mount		物距	倍率	视野 2/3"(mm)		
型号 Model	FM7520MP10	mm	-	H	V	
像机尺寸 Image Size	2/3-inch	1350	0.0581X	151.4	113.6	
焦距 Focal length	75mm	1300	0.0605X	145.6	109.2	
光圈范围 F No.	F2.0-16	1250	0.0630X	139.7	104.8	
最短物距 M.O.D(m)	0.8-Inf.	1200	0.0658X	133.8	100.3	
控制方式 Operation	Iris	Manual 手动调整	1150	0.0688X	127.9	95.9
	Focus	Manual 手动调整	1100	0.0721X	122.1	91.5
视场角 Angle of View (D×H×V)	2/3"	8.4°×6.7°×5.0°	1050	0.0757X	116.2	87.1
	1/2"	6.1°×4.9°×3.7°	1000	0.0798X	110.3	82.7
	1/3"	4.6°×3.7°×2.7°	950	0.0843X0	104.4	78.3
工作波长 Operating Wavelength	400nm~700nm	900	0.8930X	98.54	74.0	
畸变 TV Distortion	-0.02%	850	0.0900X	93.5	70.3	
光学后焦 BFL	10.54mm(in air)	800	0.1000X	88.0	66.0	
法兰距 Flange FL	17.526mm	-	-	-	-	
接口 Mount	C-Mount	-	-	-	-	
近摄视野 2/3"FOV	94.5mm×79.0mm(WD=800mm)	-	-	-	-	
外形尺寸 Dimension	Φ50×65mm	-	-	-	-	
重量 Weight	338.1g	-	-	-	-	
分辨率 Resolution	10MP	-	-	-	-	
滤镜尺寸 Filter	M43 P=0.75mm	-	-	-	-	
工作温度 Working Temperature	-20°C ~ +60°C	-	-	-	-	

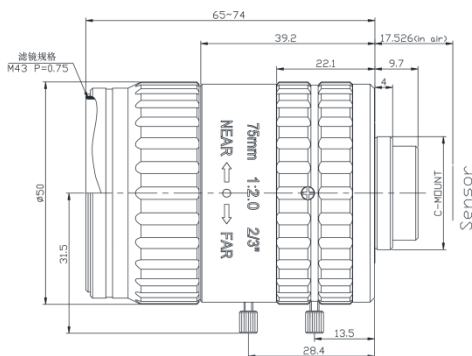