


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：1/1.7" C 型 35mm F2.8
- ◆ 多层镀膜, 兼容可见光和红外光
- ◆ 1200 万像素高清晰度画面
- ◆ 低物距、低畸变、对比度好
- ◆ 抗震结构, 高低温稳定性强
- ◆ 体积小适用于工业检测, 机器视觉



产品规格书：

1200 万像素 35mm 低畸变镜头 C Mount		物距 Working Distance	倍率 Magnification	视野 1/1.7" Field of View(7.6*5.7mm)	
型号 Model	LM3528MP12	mm	X	H	V
像机尺寸 Image Size	1/1.7-inch(Φ9.5)	1000	0.0369X	206.23	154.69
焦距 Focal length	35mm	900	0.0407X	186.59	139.95
光圈范围 F No.	F2.8-16	800	0.0456X	166.89	125.16
最短物距 M.O.D(m)	0.2-Inf.	700	0.0517x	147.11	110.32
控制方式 Operation	Iris	Manual 手动调整	650	0.0554X	137.18
	Focus	Manual 手动调整	600	0.0598X	127.22
视场角 (D*H*V) Angle of View	1/1.7"	13.75°×11.03°×8.29°	550	0.0649X	117.22
畸变 Distortion	<0.08%	500	0.0710X	107.18	80.37
光学后焦 BFL	13.91~23.43mm	450	0.0784X	97.09	72.80
法兰后焦距 Flange BFL	17.526mm	400	0.0875X	86.92	65.17
接口 Mount	C-Mount	350	0.0992X	76.67	57.48
最大主光线夹角 CRA	5.54°	300	0.1148X	66.30	49.70
外形尺寸 Dimension	Φ29×35.92mm	250	0.1365X	55.76	41.80
重量 Weight	64.0g	200	0.1692X	44.98	33.72
滤镜尺寸 Filter Thread	M27xP0.5	150	/	/	/
工作温度 Working Temperature	-20°C ~ +60°C	100	/	/	/

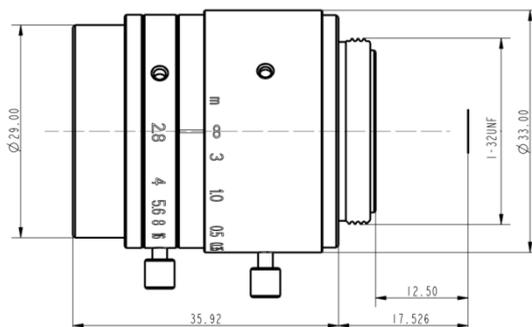