


- ◆ 品牌：中联科创 (ZLKC)
- ◆ 规格：2/3" C 型 f=16mm
- ◆ 多层镀膜，有效抑制杂光和鬼像
- ◆ 螺口调焦固定高品质影像
- ◆ 高分辨率、高对比度、低畸变
- ◆ 具有良好的抗振动和抗冲击性
- ◆ 适用于精准测量或抖动视觉环境



产品规格书：

抗振镜头 16mm 低畸变 C-Mount		物距 Working Distance	倍率 Magnification	视野 2/3"Field of View(mm)	
型号 Model	AM1614MP5	mm	-	H	V
像机尺寸 Image Size	2/3-inch	900	0.018X	503.2	376.8
焦距 Focal length	16mm	850	0.019X	475.6	356.2
光圈范围 F No.	F1.4(可定制 2.8/4/8/14/15/16)	800	0.020X	448.0	335.5
最短物距 M.O.D(m)	0.3-Inf.	750	0.021X	420.4	314.8
控制方式 Operation	Iris	Fix 固定	700	0.023X	392.8
	Focus	Manual 手动调整	650	0.024X	365.2
视场角 Angle of View (DxHxV)	2/3"	38.1°x30.5°x23.1°	600	0.026X	337.6
	1/2"	27.8°x22.3°x16.8°	550	0.029X	310.0
畸变 Distortion	<0.1%	500	0.031X	282.5	211.4
光学后焦 BFL	12.7mm	450	0.035X	254.9	190.7
接口 Mount	C-Mount	400	0.039X	227.3	170.0
近摄视野 Object Dimension	170.4mmx127.6mm(WD=300 mm)	350	0.044X	199.7	149.4
外形尺寸 Dimension	Φ30.8x31.34mm	300	0.052X	170.4	127.6
重量 Weight	63.7g	250	0.061X	144.5	108.0
前后口径 Front / Rear Effective Dia(mm)	Front Φ19 Rear Φ14.2	200	0.076X	116.9	87.3
滤镜尺寸 Filter Thread	M28.5x 0.5	150	0.100X	89.3	66.6
工作温度 Working Temperature	-20°C ~ +60°C	100	0.145X	61.7	45.9

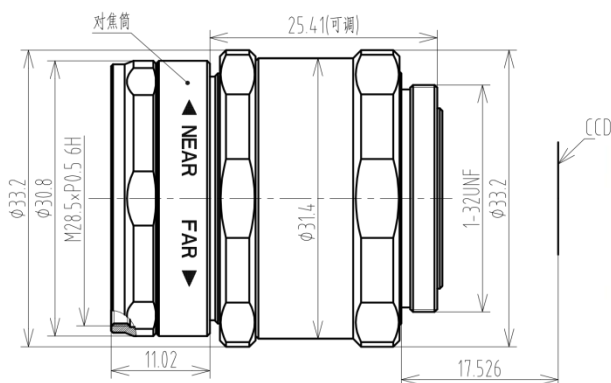