


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=25mm
- ◆ 多层镀膜，有效抑制杂光和鬼像
- ◆ 螺口调焦固定高品质影像
- ◆ 高分辨率、高对比度、低畸变
- ◆ 具有良好的抗振动和抗冲击性
- ◆ 适用于精准测量或抖动视觉环境



产品规格书：

抗振镜头 25mm 低畸变 C-Mount		物距 Working Distance	倍率 Magnification	视野 2/3"Field of View(mm)	
型号 Model	AM2514MP5	mm	-	H	V
像机尺寸 Image Size	2/3-inch	900	0.028X	317.5	237.7
焦距 Focal length	25mm	850	0.029X	299.9	224.5
光圈范围 F No.	F1.4(可定制 2.8/4/8/14/15/16)	800	0.031X	282.3	211.3
最短物距 M.O.D(m)	0.1-Inf.	750	0.033X	264.6	198.1
控制方式 Operation	Iris	Fix 固定	700	0.036X	247.0
	Focus	Manual 手动调整	650	0.039X	229.4
视场角 Angle of View (D×H×V)	2/3"	24.8°×20.0°×15.0°	600	0.042X	211.8
	1/2"	18.1°×14.5°×11.1°	550	0.046X	194.1
畸变 Distortion	<0.05%	500	0.050X	176.5	132.0
光学后焦 BFL	12.25mm	450	0.056X	158.9	118.8
接口 Mount	C-Mount	400	0.063X	141.2	105.6
近摄视野 Object Dimension	108.0mm×82.0mm (WD=300mm)	350	0.072X	123.6	92.4
外形尺寸 Dimension	Φ32.8×30.77mm	300	0.084X	108.0	82.0
重量 Weight	67.9g	250	0.100X	88.3	66.0
前后口径 Front / Rear Effective Dia(mm)	Front Φ22.7 Rear Φ12.6	200	0.126X	70.7	52.7
滤镜尺寸 Filter Thread	M30.5x 0.5	150	0.168X	53.0	39.5
工作温度 Working Temperature	-20°C ~ +60°C	100	0.253X	35.3	26.3

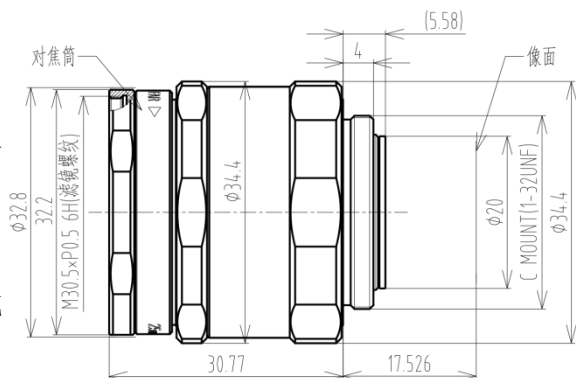