


- ◆ 品牌：中联科创（ZLKC）
- ◆ 规格：2/3" C 型 f=35mm
- ◆ 多层镀膜，有效抑制杂光和鬼像
- ◆ 螺口调焦固定高品质影像
- ◆ 高分辨率、高对比度、低畸变
- ◆ 具有良好的抗振动和抗冲击性
- ◆ 适用于精准测量或抖动视觉环境



产品规格书：

抗振镜头 35mm 低畸变 C-Mount		物距 Working Distance	倍率 Magnification	视野 2/3"Field of View(mm)		
型号 Model	AM3514MP5	mm	-	H	V	
像机尺寸 Image Size	2/3-inch	900	0.037X	236.2	176.9	
焦距 Focal length	35mm	850	0.040X	223.2	167.2	
光圈范围 F No.	F1.4(可定制 2.8/4/8/14/15/16)	800	0.042X	210.3	157.5	
最短物距 M.O.D(m)	0.15-Inf.	750	0.045X	197.3	147.8	
控制方式 Operation	Iris	Fix 固定	700	0.048X	184.3	138.1
	Focus	Manual 手动调整	650	0.052X	171.4	128.4
视场角 Angle of View (DxHxV)	2/3"	17.5°x14°x10.3°	600	0.056X	158.4	118.6
	1/2"	12.6°x10.1°x7.6°	550	0.061X	145.5	108.9
畸变 Distortion	<0.4%	500	0.067X	132.5	99.2	
光学后焦 BFL	8.7mm	450	0.074X	119.6	89.5	
接口 Mount	C-Mount	400	0.083X	106.6	79.8	
近摄视野 Object Dimension	80.7mmx60.4mm(WD=300m m)	350	0.094X	93.7	70.1	
外形尺寸 Dimension	Φ38.7x40.69mm	300	0.110X	80.7	60.4	
重量 Weight	112.3g	250	0.131X	67.7	50.6	
前后口径 Front / Rear Effective Dia(mm)	Front Φ24.8 Rear Φ13.6	200	0.162X	54.7	40.9	
滤镜尺寸 Filter Thread	M35.5x 0.5	150	0.213X	41.8	31.2	
工作温度 Working Temperature	-20°C ~ +60°C	-	-	-	-	

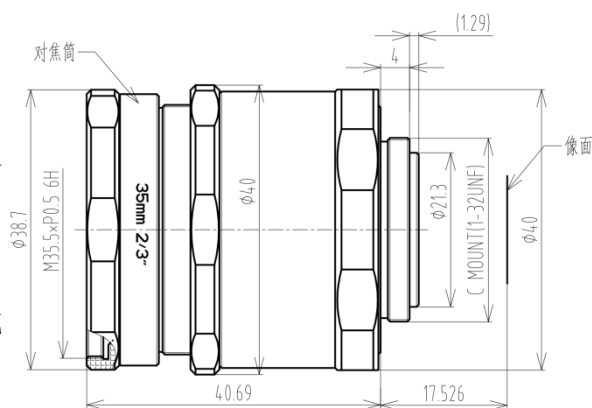